WECO

WECO ELEVATOR PRODUCTS

DATA SHEET
DOOR DETECTOR 03.G5.VAM.154

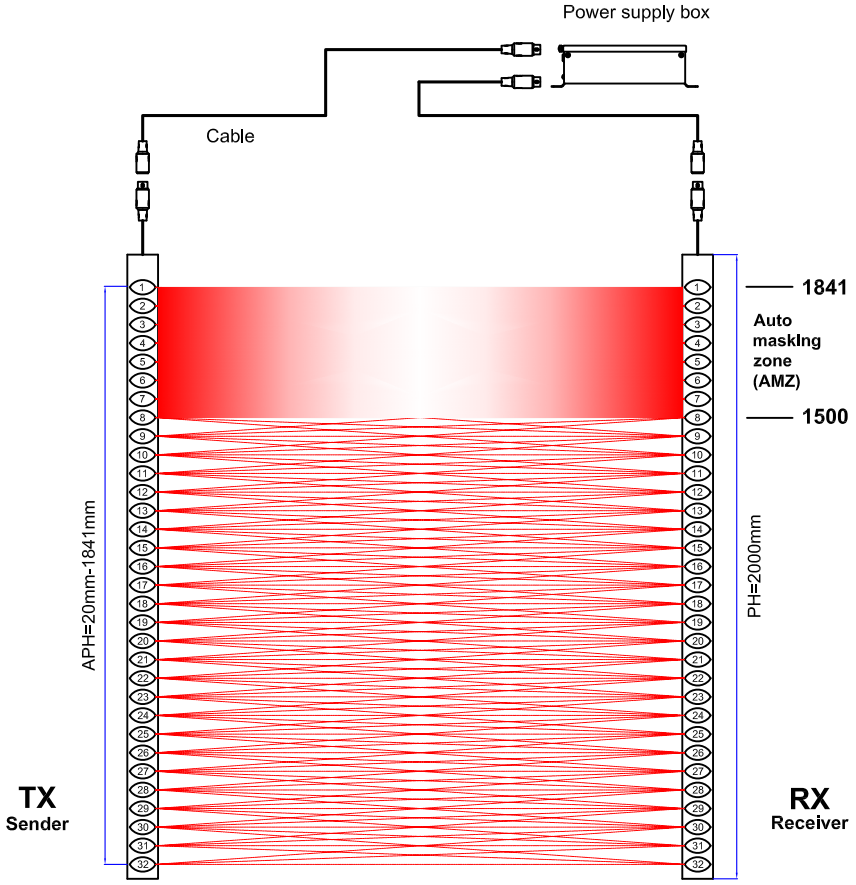



V Profile

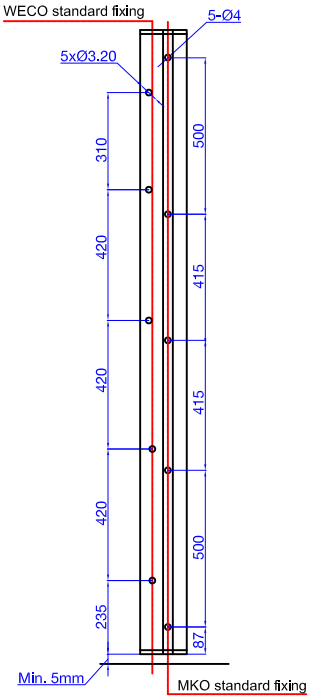

Max. number of beams	154
Diodes	32
Effective distance	0mm - 4000mm
Lowest beam	20mm
Uppermost beam	1841mm
Dist. between diodes	58.80mm
Light immunity	100,000 lux
Profile height (PH)	2000mm, Min. 1950mm, Max. 2780mm
Profile material	Aluminium
Protection rating	IP54
Operating temperature	-20°C to +65°C
Alignment tolerance	Vertical: +/- 20mm (10°)
	Horizontal: +/- 3mm (7°)
Response time	61ms
Power consumption	<=4w or 100mA@24VDC
Signal output	Relay contact: 1 NO & 1 NC
LEDs in receiver	Yellow: Power indicator
	Red: ☼ Beams interrupted or system fault
	Red: ● Normal
Power supply	15VDC - 30VDC
	100VDC
	230VAC +/- 15%, 50/60Hz

Norms	EN 81-70
EMV - Emission	EN 12015
EMV - Immunity	EN 12016
QMS	ISO9001
EMS	ISO14001
Standard cable length	3250mm (250mm + 3000mm)
Optional cable length	2750mm (250mm + 2500mm)
	3750mm (250mm + 3500mm)
	4250mm (750mm + 3500mm)
	5250mm (250mm + 5000mm)
Internal wiring	Red: +
	Black: -
	Yellow: Synchro
	Green: Output
Cable diameter	Ø5.90mm
Material	PVC

Doc. Nr.	03.G5.VAM.154
Date	10.FEB.2014
Control	E317230F-DJ

info@wecoeurope.com